

ELECTRIC POWER - Technical Spec Sheet STANDARD



C15 ACERT
500 ekW/ 625 kVA/ 60 Hz/ 1800 rpm/ 480 V/ 0.8 Power Factor

Rating Type: STANDBY

Emissions: U.S. EPA Certified for Stationary Emergency Use Only (Tier 2 Nonroad Equivalent Emission Standards)



C15 ACERT
500 ekW/ 625 kVA
60 Hz/ 1800 rpm/ 480 V

Image shown may not reflect actual configuration

Metric English

Package Performance		
Genset Power Rating with Fan @ 0.8 Power Factor	500 ekW	
Genset Power Rating	625 kVA	
Aftercooler (Separate Circuit)	N/A	N/A

Fuel Consumption		
100% Load with Fan	137.0 L/hr	36.2 gal/hr
75% Load with Fan	110.5 L/hr	29.2 gal/hr
50% Load with Fan	71.3 L/hr	18.8 gal/hr
25% Load with Fan	41.9 L/hr	11.1 gal/hr

Cooling System ¹		
Engine Coolant Capacity	20.8 L	5.5 gal

Inlet Air		
Combustion Air Inlet Flow Rate	38.2 m ³ /min	1347.7 cfm
Max. Allowable Combustion Air Inlet Temp	49 ° C	120 ° F

Exhaust System		
Exhaust Stack Gas Temperature	531.1 ° C	988.0 ° F
Exhaust Gas Flow Rate	102.1 m ³ /min	3605.5 cfm
Exhaust System Backpressure (Maximum Allowable)	10.0 kPa	40.0 in. water

NJPA CONTRACT

#080613-CAT

Generator Sets

Switchgear

UPS & ATS

As you continue to look for more efficient ways to do business at your governmental or not-for-profit organization, the contract between Caterpillar and the NJPA can help you simplify the buying process.

Benefits include:


- Decreasing the amount of time spent putting bids together
- Avoiding a low-bid scenario situation
- Purchasing quality equipment at a greater value – higher productivity, maximum reliability and lower maintenance costs
- Working directly with your local Cat® Dealer to specify the equipment you purchase to meet your specific needs

Agencies may join free of charge by filling out the membership form:

<http://www.njpacoop.org/contract-purchasing-solutions/join-njpa/application>



BUILT FOR IT.™

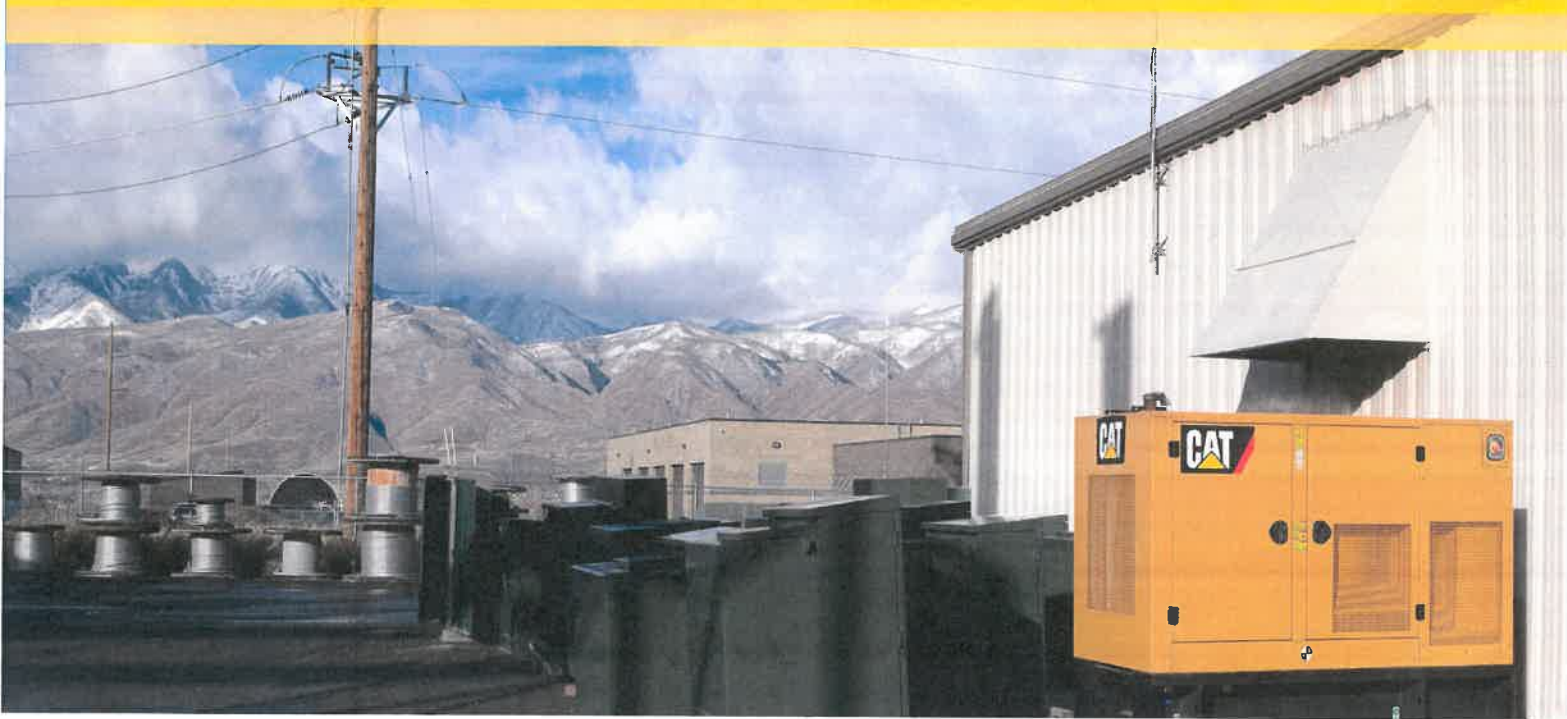

The National Institute of Governmental Purchasing (NIGP), National Association of State Procurement Officials (NASPO) and National Association of Fleet Administrators (NAFA) endorse the use of Life Cycle Costing as a preferred procurement method.

LEXE0518-02

www.catelectricpowerinfo.com/njpa

© 2014 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



DIESEL GENERATOR SET



Image shown may not reflect actual package.

STANDBY
500 ekW 625 kVA
60 Hz 1800 rpm 480 Volts

Caterpillar is leading the power generation marketplace with Power Solutions engineered to deliver unmatched flexibility, expandability, reliability, and cost-effectiveness.

FEATURES

FUEL/EMISSIONS STRATEGY

- EPA Certified for Stationary Emergency Application (EPA Tier 2 emissions levels)

DESIGN CRITERIA

- The generator set accepts 100% rated load in one step per NFPA 110 and meets ISO 8528-5 transient response

UL 2200 / CSA – Optional

- UL 2200 Listed packages
- CSA Certified

Certain restrictions may apply.
Consult with your Cat® Dealer.

FULL RANGE OF ATTACHMENTS

- Wide range of bolt-on system expansion attachments, factory designed and tested
- Flexible packaging options for easy and cost effective installation

SINGLE-SOURCE SUPPLIER

- Fully prototype tested with certified torsional vibration analysis available

WORLDWIDE PRODUCT SUPPORT

- Cat dealers provide extensive post sale support including maintenance and repair agreements
- Cat dealers have over 1,800 dealer branch stores operating in 200 countries
- The Cat S•O•SSM program cost effectively detects internal engine component condition, even the presence of unwanted fluids and combustion by-products

CAT C15 ATAAC DIESEL ENGINE

- Utilizes ACERT™ Technology
- Reliable, rugged, durable design
- Field-proven in thousands of applications worldwide
- Four-stroke-cycle diesel engine combines consistent performance and excellent fuel economy with minimum weight
- Electronic controlled governor

CAT GENERATOR

- Matched to the performance and output characteristics of Cat engines
- UL 1446 Recognized Class H insulation
- CSA Certified

CAT EMCP 4 CONTROL PANELS

- Simple user friendly interface and navigation
- Scalable system to meet a wide range of customer needs
- Integrated Control System and Communications Gateway
- Integrated Voltage Regulation

SEISMIC CERTIFICATION

- Seismic Certification available
- Anchoring details are site specific, and are dependent on many factors such as generator set size, weight, and concrete strength.
IBC Certification requires that the anchoring system used is reviewed and approved by a Professional Engineer
- Seismic Certification per Applicable Building Codes: IBC 2000, IBC 2003, IBC 2006, IBC 2009, IBC 2012, CBC 2007, CBC 2010

STANDBY 500 ekW 625 kVA
60 Hz 1800 rpm 480 Volts



FACTORY INSTALLED STANDARD & OPTIONAL EQUIPMENT

System	Standard	Optional
Air Inlet	<ul style="list-style-type: none"> • Disposable air filter 	<input type="checkbox"/> Canister type, dual element <input type="checkbox"/> Heavy duty air cleaner
Cooling	<ul style="list-style-type: none"> • Package mounted radiator 	
Exhaust	<ul style="list-style-type: none"> • Exhaust flange outlet 	<input type="checkbox"/> Industrial <input type="checkbox"/> Residential / Critical
Fuel	<ul style="list-style-type: none"> • Primary fuel filter with integral water separator • Secondary fuel filters • Fuel priming pump 	
Generator	<ul style="list-style-type: none"> • Matched to the performance and output characteristics of Cat engines • IP23 Protection 	<input type="checkbox"/> Permanent magnet excitation (PMG) <input type="checkbox"/> Anti-condensation space heater <input type="checkbox"/> Internal excitation (IE) <input type="checkbox"/> Coastal insulation protection
Power Termination	<ul style="list-style-type: none"> • Power terminal strips 	<input type="checkbox"/> Circuit breakers – 100% rated assembly, UL Listed <input type="checkbox"/> SUSE (Suitable for use as service equipment)
Control Panels	<ul style="list-style-type: none"> • EMCP 4.2 	<input type="checkbox"/> EMCP 4.3 <input type="checkbox"/> EMCP 4.4 <input type="checkbox"/> Local and remote annunciator modules <input type="checkbox"/> Remote monitoring software
Mounting	<ul style="list-style-type: none"> • Rubber vibration isolators 	
Starting/Charging	<ul style="list-style-type: none"> • 24 volt starting motor & charging alternator • Batteries 	<input type="checkbox"/> Battery chargers <input type="checkbox"/> Oversize batteries <input type="checkbox"/> Jacket water heater
General	<ul style="list-style-type: none"> • Paint - Caterpillar Yellow except rails and radiators gloss black • Narrow skid base 	<p>The following options are based on regional and product configuration:</p> <input type="checkbox"/> Seismic Certification per Applicable Building Codes: IBC 2000, IBC 2003, IBC 2006, IBC 2009, IBC 2012, CBC 2007, CBC 2010 <input type="checkbox"/> UL 2200 Listed package <input type="checkbox"/> CSA Certified <input type="checkbox"/> Wide skid base <input type="checkbox"/> Sound attenuated enclosure <input type="checkbox"/> Weather protective enclosure <input type="checkbox"/> Integral dual wall UL Listed 8 hr fuel tank <input type="checkbox"/> Sub-base dual wall UL Listed 24 hr fuel tank <input type="checkbox"/> Sub-base dual wall UL Listed 48 hr fuel tank

STANDBY 500 ekW 625 kVA
60 Hz 1800 rpm 480 Volts



SPECIFICATIONS

STANDARD CAT GENERATOR	
Frame size	LC6114F
Excitation	Self Excitation
Pitch	0.6667
Number of poles	4
Number of bearings	Single bearing
Number of leads	12
Insulation	UL 1446 Recognized Class H with tropicalization and antiabrasion
IP Rating	IP23
Alignment	Pilot shaft
Overspeed capability (%)	125
Wave form deviation (%)	2
Voltage regulator	Three phase sensing
Voltage regulation	+/- 0.25% (steady state)
- Consult your Cat dealer for other available voltages	
CAT DIESEL ENGINE	
C15 ATAAC, I-6, 4-Stroke Water-cooled Diesel	
Bore	137.20 mm (5.4 in)
Stroke	171.40 mm (6.75 in)
Displacement	15.20 L (927.56 in ³)
Compression ratio	16.1:1
Aspiration	Air-to-air aftercooled
Fuel system	MEUI
Governor type	Caterpillar ADEM control system

CAT EMCP 4 SERIES CONTROLS

EMCP 4 controls including:

- Run / Auto / Stop Control
- Speed and Voltage Adjust
- Engine Cycle Crank
- 24-volt DC operation
- Environmental sealed front face
- Text alarm/event descriptions

Digital indication for:

- RPM
- DC volts
- Operating hours
- Oil pressure (psi, kPa or bar)
- Coolant temperature
- Volts (L-L & L-N), frequency (Hz)
- Amps (per phase & average)
- ekW, kVA, kVAR, kW-hr, %kW, PF (4.2 only)

Warning/shutdown with common LED indication of:

- Low oil pressure
- High coolant temperature
- Overspeed
- Emergency stop
- Failure to start (overcrank)
- Low coolant temperature
- Low coolant level

Programmable protective relaying functions:

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under Frequency (81 o/u)
- Reverse Power (kW) (32) (4.2 only)
- Reverse reactive power (kVA) (32RV)
- Overcurrent (50/51)

Communications:

- Four digital inputs (4.1)
- Six digital inputs (4.2 only)
- Four relay outputs (Form A)
- Two relay outputs (Form C)
- Two digital outputs
- Customer data link (Modbus RTU) (4.2 only)
- Accessory module data link (4.2 only)
- Serial annunciator module data link (4.2 only)
- Emergency stop pushbutton

Compatible with the following:

- Digital I/O module
- Local Annunciator
- Remote CAN annunciator
- Remote serial annunciator

STANDBY 500 ekW 625 kVA
60 Hz 1800 rpm 480 Volts



TECHNICAL DATA

Open Generator Set - - 1800 rpm/60 Hz/480 Volts	DM8155	
EPA Certified for Stationary Emergency Application (EPA Tier 2 emissions levels)		
Generator Set Package Performance Genset power rating @ 0.8 pf Genset power rating with fan	625.0 kVA 500.0 ekW	
Fuel Consumption 100% load with fan 75% load with fan 50% load with fan	138.5 L/hr 106.1 L/hr 88.1 L/hr	36.6 gal/hr 28.0 gal/hr 23.3 gal/hr
Cooling System¹ Air flow restriction (system) Air flow (max @ rated speed for radiator arrangement) Engine Coolant capacity with radiator/exp. tank Engine coolant capacity Radiator coolant capacity	0.12 kPa 788 m ³ /min 50.3L 20.8 L 29.5 L	0.48 in. water 27828 cfm 13.3 gal 5.5 gal 7.8 gal
Inlet Air Combustion air inlet flow rate	39.8 m ³ /min	1405.5 cfm
Exhaust System Exhaust stack gas temperature Exhaust gas flow rate Exhaust flange size (internal diameter) Exhaust system backpressure (maximum allowable)	505.6.0°C 108.8 m ³ /min 152.4 mm 10.0 kPa	942.1°F 3842.2 cfm 6.0 in 40.2 in. water
Heat Rejection Heat rejection to coolant (total) Heat rejection to exhaust (total) Heat rejection to aftercooler Heat rejection to atmosphere from engine Heat rejection to atmosphere from generator	189 kW 505 kW 120 kW 94.0 kW 29.1 kW	10748 Btu/min 28719 Btu/min 6824 Btu/min 5346 Btu/min 1654.9 Btu/min
Alternator² Motor starting capability @ 30% voltage dip Frame Temperature rise	1428 skV LC6114F 130°C	234°F
Lubrication System Sump refill with filter	60.0 L	15.9 gal
Emissions (Nominal)³ NOx g/hp-hr CO g/hp-hr HC g/hp-hr PM g/hp-hr	5.74 g/hp-hr 0.4 g/hp-hr 0.01 g/hp-hr 0.018 g/hp-hr	

¹For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

²Generator temperature rise is based on a 40°C (104°F) ambient per NEMA MG1-32. Some packages may have oversized generators with a different temperature rise and motor starting characteristics.

³Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77°F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

STANDBY 500 ekW 625 kVA

60 Hz 1800 rpm 480 Volts



RATING DEFINITIONS AND CONDITIONS

Applicable Codes and Standards:

AS1359, CSA, IEC60034-1, ISO3046, ISO8528, NEMA MG 1-22, NEMA MG 1-33.

Standby – Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions.

STANDBY 500 kW 625 kVA

60 Hz 1800 rpm 480 Volts



DIMENSIONS

Package Dimensions		
Length	3361 mm	132.3 in
Width	1502 mm	59.1 in
Height	2127 mm	83.7 in

NOTE: For reference only – do not use for installation design. Please contact your local dealer for exact weight and dimensions.

Performance No.: DM8155

Feature Code: C15DECF

Gen. Arr. Number: 4183867

Source: U.S. Sourced

EPD0211 (06/13)

www.Cat-ElectricPower.com

2013 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.
The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos, "CaterpillarYellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.